

CHEVROLET LIGHTING PROGRAM

SHOWROOM

TYPE:F27B LED

APPLICATION:

Chevrolet Dealership Lighting

CONSTRUCTION:

Die-cast aluminum heat sink and lamp housing
Low frequency active cooling

MOUNTING:

Grid ceiling mounting

LABELING:



OPTICS:

LED cluster

Color Temp: 2700K (2725K \pm 175)
3000K (3045K \pm 175)

CRI: 85

Life: 50,000 hrs

Lumen Maintenance: >70% of initial

lumens @ 50,000 hrs

Lumen output: 1200 typ. (est.)

0-45°x45° tilt, 360° rotation

Beam options: Spot 12°, Flood 25°, Wide Flood 40°

Field interchangeable spun aluminum reflectors

ELECTRICAL:


Electronic constant current LED driver

120v or 277v input

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux recommends using additional surge protection with this unit (supplied by others), surge damage is not covered by warranty.



Electrostatic sensitive device,
observe precautions for
handling

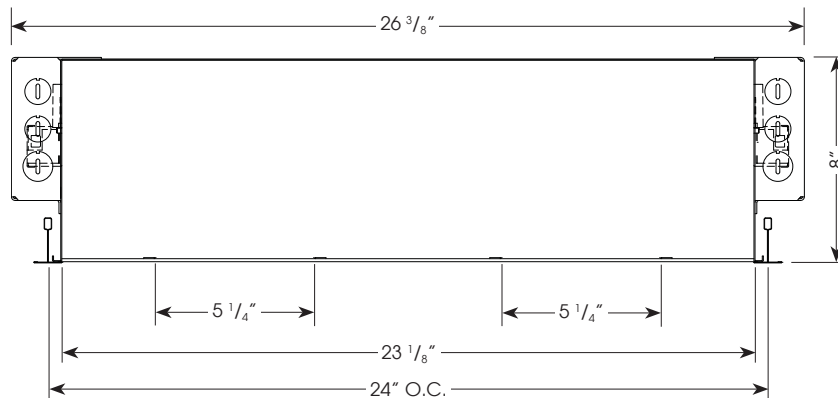

CERTIFIED PROGRAM LIGHTING

10 year limited
warranty
AMERLUX LED

ORDERING INFORMATION:

Cat #

CDLC-2-26-LED-120/277-3000

Amerlux reserves the right to change details that do not affect overall function and performance.